


## TA80-K43

Autodialler for lifts kit for connection to the analogue telephone network

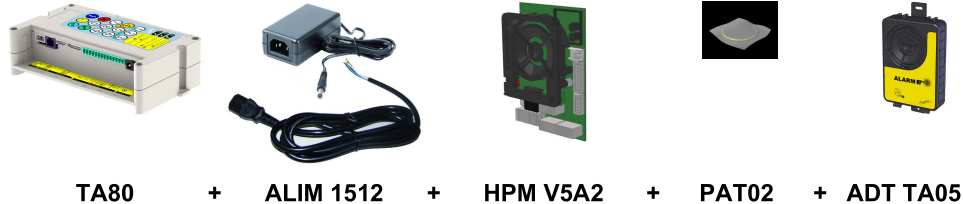

### TA80

- Conformity EN 81-28:2018:
  - Two-way communication
  - Identification of call site and type of call
  - Top-of-car call
  - End of alarm call
  - Automatic cycle test
  - Full integrated battery management - **1h of autonomy minimum**
- Simplified commissioning and addressing of the product by vocal guidance
- STI > 0,75: Sound volume and speech intelligibility according to EN 60268-16
- Product status display

### ALIM 1512

- Power supply unit 15 V, 1.2 A - *mains power cable included in delivery*

### HPM V5A2 for COP installation

- Built-in microphone and loudspeaker for car intercom
- Integrated acoustic inductive loop amplifier
- Universal polarization of pictograms and emergency lighting - *Cable (1m) supplied*
- Input for external emergency call button - *Cable (60 cm) supplied*

### PAT02

- External inductive loop cabin roof

### ADT TA05

- Loudspeaker, microphone and emergency call button underneath-the-car - *Cable for connection to the autodialler supplied (5 m)*

